

SUPERIOR CLEANING



**Ergonomic
design**



**Compact
dimensions**



**Chest
heated**




**Long-life
heating
elements**

FEATURES

- ✓ Attractive design
- ✓ Standard finger guard protection
- ✓ When unattended, the device shuts off automatically
- ✓ Reduced number of mechanical and moving parts for a lower maintenance cost
- ✓ Homogeneous ironing pressure to ensure top ironing quality
- ✓ PID controlled temperature regulation offering better temperature distribution and reduced energy consumption
- ✓ Long-life heating elements
- ✓ Anodised extruded aluminium profile avoiding temperature drop and ensuring top ironing quality
- ✓ All vital components are easily accessible
- ✓ Start/stop pedal
- ✓ Standard M-Aramid top cover sheet
- ✓ Backside of the basin is insulated with 25mm ceramic wool - no energy waste

OPTIONS

- Frequency inverter enabling variable ironing speed
- Fan exhaust removing humid air from the ironer (I25-140, I30-160, I30-200)

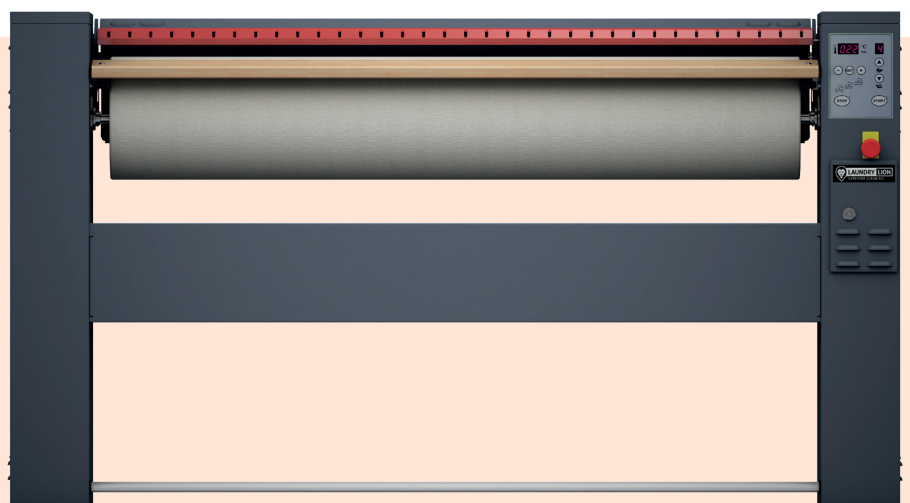

SUPERIOR CLEANING


DIMENSIONS & SPECIFICATIONS

		i25-100	i25-100V*	i25-120	i25-120V*	i25-140	i25-140V*	i25-140AV**
ROLLER DIMENSIONS								
Lenght	mm	1000	1000	1200	1200	1400	1400	1400
Diameter	mm	250	250	250	250	250	250	250
Capacity	kg/h	30	30	35	35	40	40	40
Relative Humidity	%	10-15	10-15	10-15	10-15	10-15	10-15	20-25
Type of Heating		electric	electric	electric	electric	electric	electric	electric
Speed	m/min	3,9	2-4	3,9	2-4	3,9	2-4	2-4
Voltage/Hz/ Phase Circuit Breaker								
230/50/1		25A	25A	32A	32A	32A	32A	40A
230/50/3		16A	16A	16A	16A	25A	25A	25A
230/60/1		25A	25A	32A	32A	32A	32A	40A
230/60/3		16A	16A	16A	16A	25A	25A	25A
400/50/3		10A	10A	10A	10A	16A	16A	16A
400/60/3		10A	10A	10A	10A	16A	16A	16A
440/60/3		10A	10A	10A	10A	16A	16A	16A
480/60/3		10A	10A	10A	10A	16A	16A	16A
Heating Power	kW	5						
Motor Rated Input	kW	0,18						
Total Electric Supply	kW	5,18						
Exhaust Diameter	mm	N/A	N/A	N/A	N/A	N/A	N/A	55
DIMENSIONS								
Height	mm	1005	1005	1005	1005	1005	1005	1005
Width	mm	1400	1400	1600	1600	1800	1800	1800
Depth	mm	420	420	420	420	420	420	420
TRANSPORT DATA								
Height	mm	1150	1150	1150	1150	1150	1150	1150
Width	mm	1480	1480	1680	1680	1880	1880	1880
Depth	mm	500	500	500	500	500	500	500
Net Weight	kg	110	110	118	118	135	135	135
Gross Weight	kg	119	119	130	130	154	154	154

* Option V = Variable Speed & Adjustable Temperature

**Option AV = Variable Speed, Adjustable Temperature, & Suction Fan


Front



Side



Side

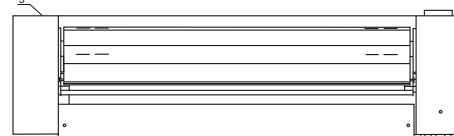

1. Control panel
2. Emergency stop button
3. Main switch and power supply

