

SUPERIOR CLEANING



**Ergonomic
design**



**Cylinder heated
drying ironers**



**High
production**




**Long-life
heating
elements**

FEATURES

- ✓ Large surface contact with linen over an angle of 300°
- ✓ Finger protection and emergency button for more safety
- ✓ Durable Meta Aramid NOMEX® ironing belts
- ✓ Automatic cooldown
- ✓ Easy to operate microprocessor: 20 ironing programmes
- ✓ Indication of ironing speed and temperature
- ✓ Reverse mode possible
- ✓ Variable setups for folding
- ✓ Built-in feeding and length folding system
- ✓ Frequency controlled motor
- ✓ Easy to remove lint filters
- ✓ Standard anti-static bar
- ✓ Folding system requires less maintenance (no ribbons and rolls)
- ✓ Electric, gas or steam heating

OPTIONS

- Crossfolder and stacker
- Chrome-plated cylinder for a better thermal conduction

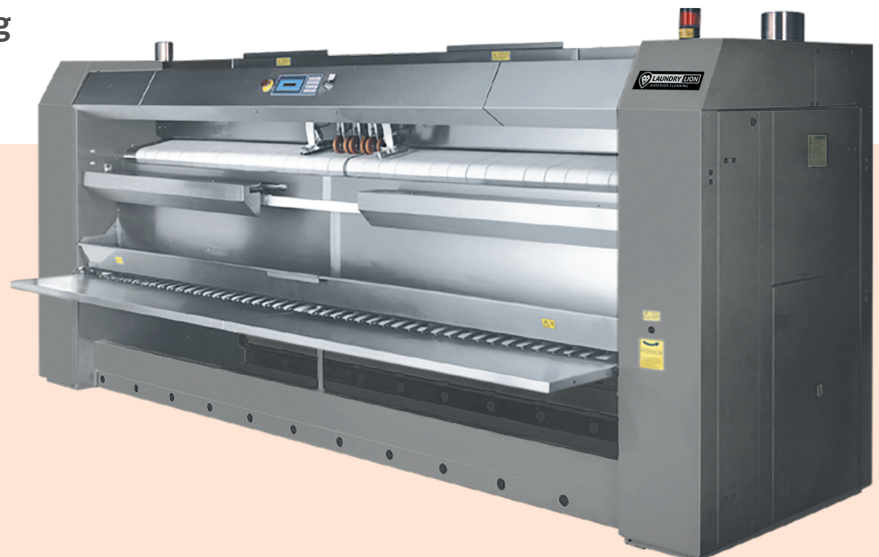

SUPERIOR CLEANING

DIMENSIONS & SPECIFICATIONS

		LSREP 5020	LSREP 5025	LSREP 5032
ROLLER DIAMETER	<i>mm</i>	500	500	500
USEFUL ROLLER LENGHT	<i>mm</i>	2000	2600	3200
HEATING				
Electric heating	<i>kW</i>	38	72	-
Gas heating***	<i>kW</i>	36	52	66
Steam heating	<i>kg/h</i>	49	68	88
MOTOR				
Roller motor	<i>kW</i>	0,98	1,2	1,2
Fan motor	<i>kW</i>	0,18/0,255	2×0,18/0,255	2×0,18/0,255
IRONING CAPACITY*				
Electrical & Gas heating	<i>kg/h</i>	80	95	120
Steam heating	<i>kg/h</i>	95	115	145
ROLLER SPEED	<i>m/min</i>	1,5-8	1,5-8	1,5-8
ELECTRIC CONNECTION			3×380-415V+N 50/60Hz	
			3×208-240V 50/60Hz	
COMPRESSED AIR CONNECTION**	<i>inch</i>	exterior: 1/2 - interior: 1/4		
DIMENSIONS				
Ironer H×W×D unpacked	<i>mm</i>	1760x2850x1320	1760x3450x1320	1760x4500x1320
Crossfolder H×W×D unpacked	<i>mm</i>	-	1010x3500x870	1010x4100x870
Stacker H×W×D unpacked	<i>mm</i>	-	1300x2754x1220	1300x2754x1220
TRANSPORT DATA				
Net/gross weight	<i>kg</i>	1720/1990	2180/2460	2400/2770
Ironer H×W×D packed	<i>mm</i>	2090x2990x1450	2090x3590x1450	2090x4190x1450
Cross-folder net/gross	<i>kg</i>	-	515/760	560/810
Crossfolder H×W×D packed	<i>mm</i>	-	1390x3730x1050	1390x4330x1050
Stacker net/gross	<i>kg</i>	-	290/490	290/490
Stacker H×W×D packed	<i>mm</i>	-	1575x3050x1250	1575x3050x1250

* Tested in accordance of ISO 9398-1, ** Compressor not included

